




Nokia 6590i Speaker Replacement

remove the Phone's speaker

Written By: Colby Leslie

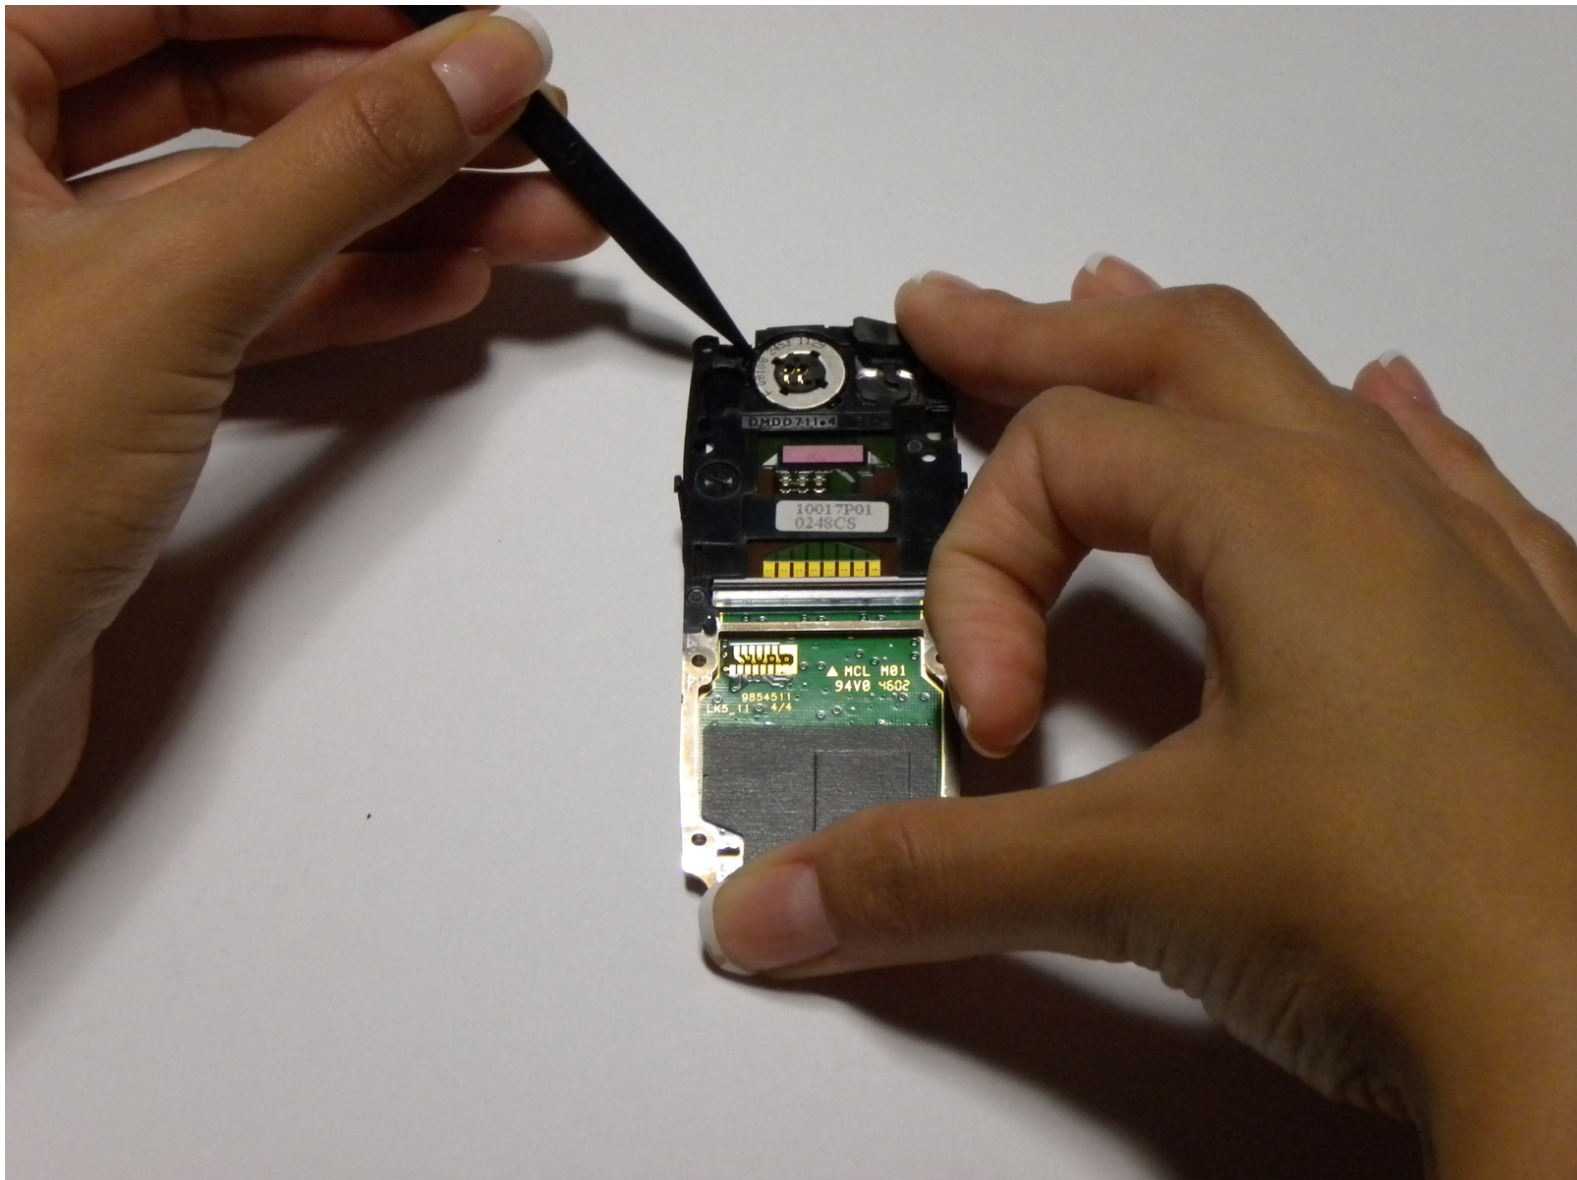

INTRODUCTION

This guide will show you how to remove the Speaker from the phone.



TOOLS:


- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Press the button to remove the back cover.
- Pull the cover downward and lift it off while still pressing the button.

Step 2

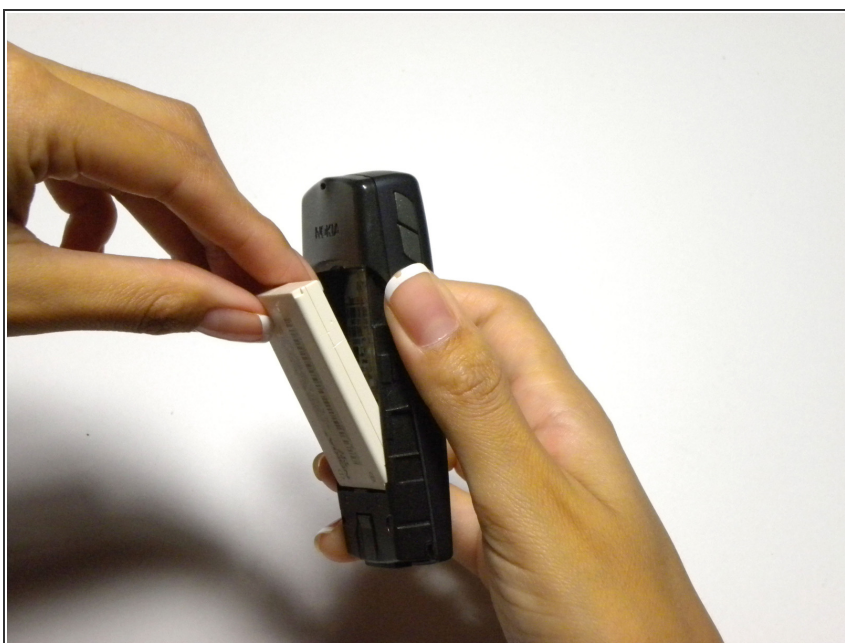

- Lift the battery out of the phone by pushing down from the top and pulling out

Step 3 — Keypad, Speaker, and Screen Assembly



- Grip the front cover from the bottom.

Step 4



- Lift the front cover off.

Step 5




- Locate 6 screws on front of assembly and unscrew them using a T6 torx screwdriver.

Step 6



- Insert spudger along edge of assembly and gently lift assembly away from case

Step 7

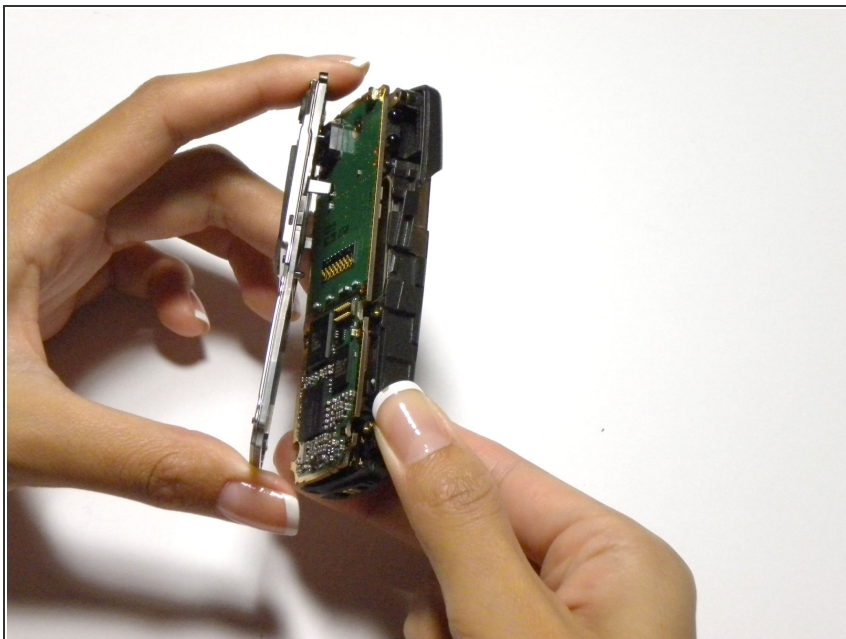


- Remove assembly from phone

Step 8 — Speaker




- Flip assembly over

Step 9

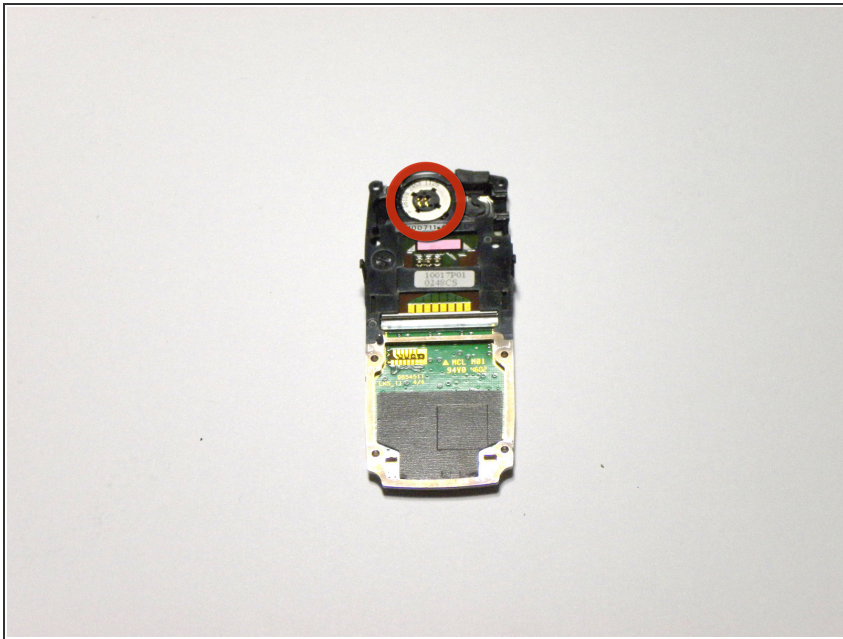


- Locate speaker on the back of the assembly.

Step 10

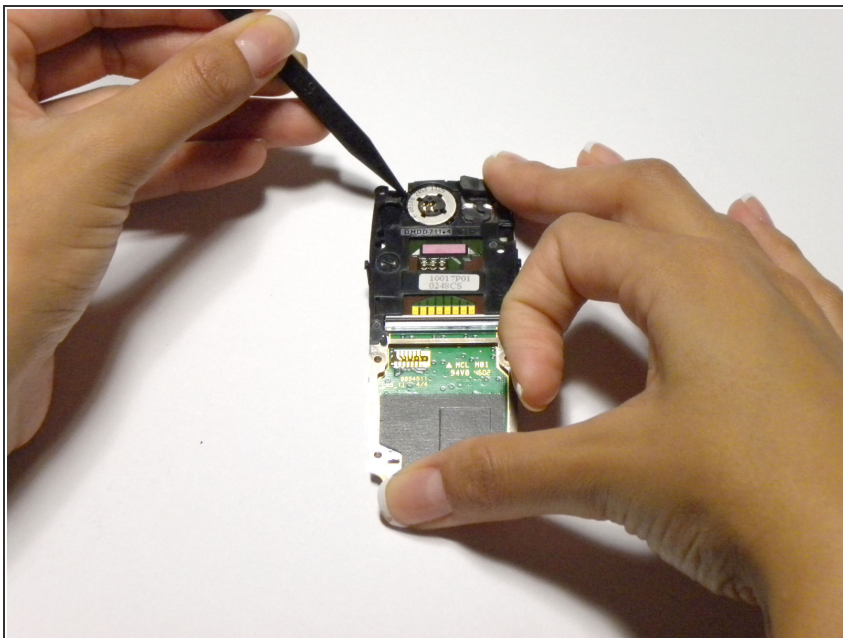

- Insert spudger under upper left side of speaker and gently lift to remove

Step 11

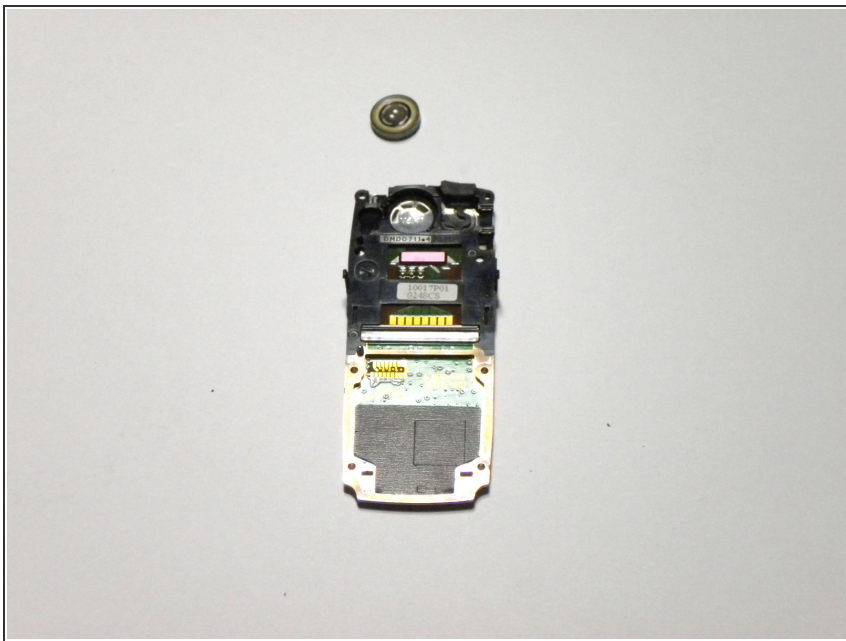

- Remove speaker.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 01:06:59 PM.